

On-Road Remote Sensing of Automobile Emissions in the Denver Area: Year 6, January 2007

Gary A. Bishop and Donald H. Stedman

**Department of Chemistry and Biochemistry
University of Denver
Denver, CO 80208**

June 2007

EXECUTIVE SUMMARY

The University of Denver conducted a three-day remote sensing study in the Denver, CO area in the winter of 2007. The remote sensor used in this study is capable of measuring the ratios of CO, HC, and NO to CO₂ in motor vehicle exhaust. From these ratios, we calculate mass emissions per kg (or gallon) of fuel and the percent concentrations of CO, CO₂, HC and NO in motor vehicle exhaust which would be observed by a tailpipe probe, corrected for water and any excess oxygen not involved in combustion. The system used in this study was also configured to determine the speed and acceleration of the vehicle, and was accompanied by a video system to record the license plate of the vehicle.

Three days of fieldwork (January 10, January 25 and February 27, 2007) were conducted on the uphill exit ramp from northbound Interstate 25 to westbound US 6 Denver, CO. A database was compiled containing 21,477 records for which the State of Colorado provided make and model year information. All of these records contained valid measurements for at least CO and CO₂, and 21,443 contained valid measurements for HC and NO as well. The database, as well as others compiled by the University of Denver, can be found at www.feat.biochem.du.edu.

The mean measurements for CO, HC, and NO were determined to be 0.19%, 46ppm, and 278ppm, (24 g/kg, 1.8 g/kg and 4 g/kg), respectively. The fleet emissions measured in this study exhibit a gamma distribution, with the dirtiest 10% of the fleet responsible for 72%, 93%, and 63% of the CO, HC, and NO emissions, respectively.

This was the sixth year of a multi-year continuing study to characterize motor vehicle emissions and deterioration in Denver, CO. The 2007 data continues to show a decreasing dependence on VSP and are once again lower than any of the previous data sets. CO, HC and NO emissions are at low levels across the entire VSP range. Using VSP, the emissions of the vehicle fleet measured in 2007 were adjusted to match the vehicle driving patterns of the fleet measured in 1999. All of the emissions continue to trend downward even at higher loads. This trend is more difficult to discern in the model year adjustments since the fleet has aged 9 years in the process and shrunk in size considerably. The increases observed in this analysis are just slightly larger than the estimated errors and point out that emission deterioration in the fleet has slowed considerably.

Tracking of model year fleets through six measurements indicates that the rate of emissions deterioration continues to slow. The observed increases in emissions only slightly exceeded the standard errors of the mean, despite the age of the fleet increasing by 9 years. An analysis of high emitting vehicles showed that there is considerable overlap of CO and HC high emitters, for instance 2.7% of the fleet emits 32% of the total CO and 34% of the total HC. The noise levels in the CO, HC and NO measurement channels were determined to be comparable to previous campaigns.

INTRODUCTION

Many cities in the United States are in violation of the air quality standards established by the Environmental Protection Agency (EPA). Carbon monoxide (CO) levels become elevated primarily due to direct emission of gas; and ground-level ozone, a major component of urban smog, is produced by the photochemical reaction of nitrogen oxides (NO_x) and hydrocarbons (HC). As of 2002, on-road vehicles were estimated to be the single largest source for the major atmospheric pollutants, contributing 82% of the CO, 45% of the VOCs, and 56% of the NO_x to the national emission inventory.¹

According to Heywood², carbon monoxide emissions from automobiles are at a maximum when the air/fuel ratio is rich of stoichiometric, and are caused solely by a lack of adequate air for complete combustion. Hydrocarbon emissions are also maximized with a rich air/fuel mixture, but are slightly more complex. When ignition occurs in the combustion chamber, the flame front cannot propagate within approximately one millimeter of the relatively cold cylinder wall. This results in a quench layer of unburned fuel mixture on the cylinder wall, which is scraped off by the rising piston and sent out the exhaust manifold. With a rich air/fuel mixture, this quench layer simply becomes more concentrated in HC, and thus more HC is sent out the exhaust manifold by the rising pistons. There is also the possibility of increased HC emissions with an extremely lean air/fuel mixture when a misfire can occur and an entire cylinder of unburned fuel mixture is emitted into the exhaust manifold. Nitric oxide (NO) emissions are maximized at high temperatures when the air/fuel mixture is slightly lean of stoichiometric, and are limited during rich combustion by a lack of excess oxygen and during extremely lean combustion by low flame temperatures. In most vehicles, practically all of the on-road NO_x is emitted in the form of NO.² Properly operating modern vehicles with three-way catalysts are capable of partially (or completely) converting engine-out CO, HC and NO emissions to carbon dioxide (CO₂), H₂O and N₂.²

Control measures to decrease mobile source emissions in non-attainment areas include inspection and maintenance (I/M) programs, oxygenated fuel mandates, and transportation control measures, but the effectiveness of these measures remains questionable. Many areas remain in non-attainment, and with the new 8-hour ozone standards introduced by the EPA in 1997, many locations still violating the standard may have great difficulty reaching attainment.³

The remote sensor used in this study was developed at the University of Denver for measuring the pollutants in motor vehicle exhaust, and has previously been described in the literature.^{4,5} The instrument consists of a non-dispersive infrared (IR) component for detecting carbon monoxide, CO₂, and hydrocarbons, and a dispersive ultraviolet (UV) spectrometer for measuring nitric oxide. The source and detector units are positioned on opposite sides of the road in a bi-static arrangement. Collinear beams of IR and UV light are passed across the roadway into the IR detection unit, and are then focused through a dichroic beam splitter, which serves to separate the beams into their IR and UV components. The IR light is then passed onto a spinning polygon mirror, which distributes the light across the four infrared detectors: CO, CO₂, HC and reference.

The UV light is reflected off the surface of the beam splitter and is focused into the end of a quartz fiber-optic cable, which transmits the light to an ultraviolet spectrometer. The UV unit is then capable of quantifying nitric oxide by measuring an absorbance band at 226.5 nm in the ultraviolet spectrum and comparing it to a calibration spectrum at the same wavelength.

The exhaust plume path length and the density of the observed plume are highly variable from vehicle to vehicle, and are dependent upon, among other things, the height of the vehicle's exhaust pipe, wind, and turbulence behind the vehicle. For these reasons, the remote sensor can only directly measure ratios of CO, HC or NO to CO₂. The ratios of CO, HC, or NO to CO₂, termed Q, Q' and Q'', respectively, are constant for a given exhaust plume; and, on their own, are useful parameters for describing a hydrocarbon combustion system. The remote sensor used in this study reports the %CO, %HC and %NO in the exhaust gas, corrected for water and excess oxygen not used in combustion. The %HC measurement is a factor of two smaller than an equivalent measurement by an FID instrument.⁶ Thus, in order to calculate mass emissions, the %HC values in the equations below would be RSD measured values multiplied by 2. These percent emissions can be directly converted into mass emissions per gallon by the equations shown below.

$$\begin{aligned} \text{gm CO/gallon} &= 5506 \times \% \text{CO} / (15 + 0.285 \times \% \text{CO} + 2.87 \times \% \text{HC}) \\ \text{gm HC/gallon} &= 8644 \times \% \text{HC} / (15 + 0.285 \times \% \text{CO} + 2.87 \times \% \text{HC}) \\ \text{gm NO/gallon} &= 5900 \times \% \text{NO} / (15 + 0.285 \times \% \text{CO} + 2.87 \times \% \text{HC}) \end{aligned}$$

These equations indicate that the relationship between concentrations of emissions to mass of emissions is almost linear, especially for CO and NO and at the typical low concentrations for HC. Thus, the percent differences in emissions calculated from the concentrations of pollutants reported here are equivalent to differences calculated from the fuel-based mass emissions of the pollutants.

Another useful conversion is directly from the measured ratios to g pollutant per kg of fuel. This conversion is achieved directly by first converting the pollutant ratio readings to the moles of pollutant per mole of carbon in the exhaust from the following equation:

$$\frac{\text{moles pollutant}}{\text{moles C}} = \frac{\text{pollutant}}{\text{CO} + \text{CO}_2 + 3\text{HC}} = \frac{(\text{pollutant}/\text{CO}_2)}{(\text{CO}/\text{CO}_2) + 1 + 6(\text{HC}/\text{CO}_2)} = \frac{(Q, 2Q', Q'')}{Q + 1 + 6Q'}$$

Next, moles of pollutant are converted to grams by multiplying by molecular weight (e.g., 44 g/mole for HC since propane is measured), and the moles of carbon in the exhaust are converted to kilograms by multiplying (the denominator) by 0.014 kg of fuel per mole of carbon in fuel, assuming gasoline is stoichiometrically CH₂. Again, the HC/CO₂ ratio must use two times the reported HC (as above) because the equation depends upon carbon mass balance and the NDIR HC reading is about half a total carbon FID reading.⁶

Quality assurance calibrations are performed as dictated in the field by the atmospheric conditions and traffic volumes. A puff of gas containing certified amounts of CO, CO₂, propane and NO is released into the instrument's path, and the measured ratios from the instrument are then compared to those certified by the cylinder manufacturer (Praxair).

These calibrations account for day-to-day variations in instrument sensitivity and variations in ambient CO₂ levels caused by atmospheric pressure and instrument path length. Since propane is used to calibrate the instrument, all hydrocarbon measurements reported by the remote sensor are as propane equivalents.

Studies sponsored by the California Air Resources Board and General Motors Research Laboratories have shown that the remote sensor is capable of CO measurements that are correct to within $\pm 5\%$ of the values reported by an on-board gas analyzer, and within $\pm 15\%$ for HC.^{7,8} The NO channel used in this study has been extensively tested by the University of Denver. Tests involving a late-model low-emitting vehicle indicate a detection limit ($\pm 3\sigma$) of 25 ppm for NO, with an error measurement of $\pm 5\%$ of the reading at higher concentrations. Appendix A gives a list of the criteria for valid/invalid data.

The remote sensor is accompanied by a video system to record a freeze-frame image of the license plate of each vehicle measured. The emissions information for the vehicle, as well as a time and date stamp, is also recorded on the video image. The images are stored digitally, so that license plate information may be incorporated into the emissions database during post-processing. A device to measure the speed and acceleration of vehicles driving past the remote sensor was also used in this study. The system consists of a pair of infrared emitters and detectors (Banner Industries), which generate a pair of infrared beams passing across the road, 6 feet apart and approximately 2 feet above the surface. Vehicle speed is calculated from the time that passes between the front of the vehicle blocking the first and the second beam. To measure vehicle acceleration, a second speed is determined from the time that passes between the rear of the vehicle unblocking the first and the second beam. From these two speeds and the time difference between the two speed measurements, acceleration is calculated and reported in mph/s.

The purpose of this report is to describe the remote sensing measurements made in the Denver, CO area in January and February 2007. Measurements were made for 3 days, Wednesday January 10, Thursday January 25 and Tuesday February 25. The measurement location used in this study was the interchange from northbound I-25 to westbound 6th Avenue in central Denver. A map of the measurement location is shown in Figure 1 and a photograph of the site in Figure 2. This interchange ramp has an uphill grade of 8% (4.6°) at the measurement location. Measurements were generally made between the hours of 8:00 and 16:00. This was the sixth experiment of an eight-year study to characterize motor vehicle emissions and deterioration in the Denver area.

RESULTS AND DISCUSSION

Following the three days of data collection in January and February 2007, the pictures were read for license plate identification. Plates, which appeared to be in state and readable, were sent to the State of Colorado to be matched against registration records. The resulting database contains 21,477 records with registration information and valid measurements for at least CO and CO₂. Most of these records also contained valid measurements for HC and NO (see Table 1). The database can be found at www.feat.biochem.du.edu. The complete structure of the database and the definitions of

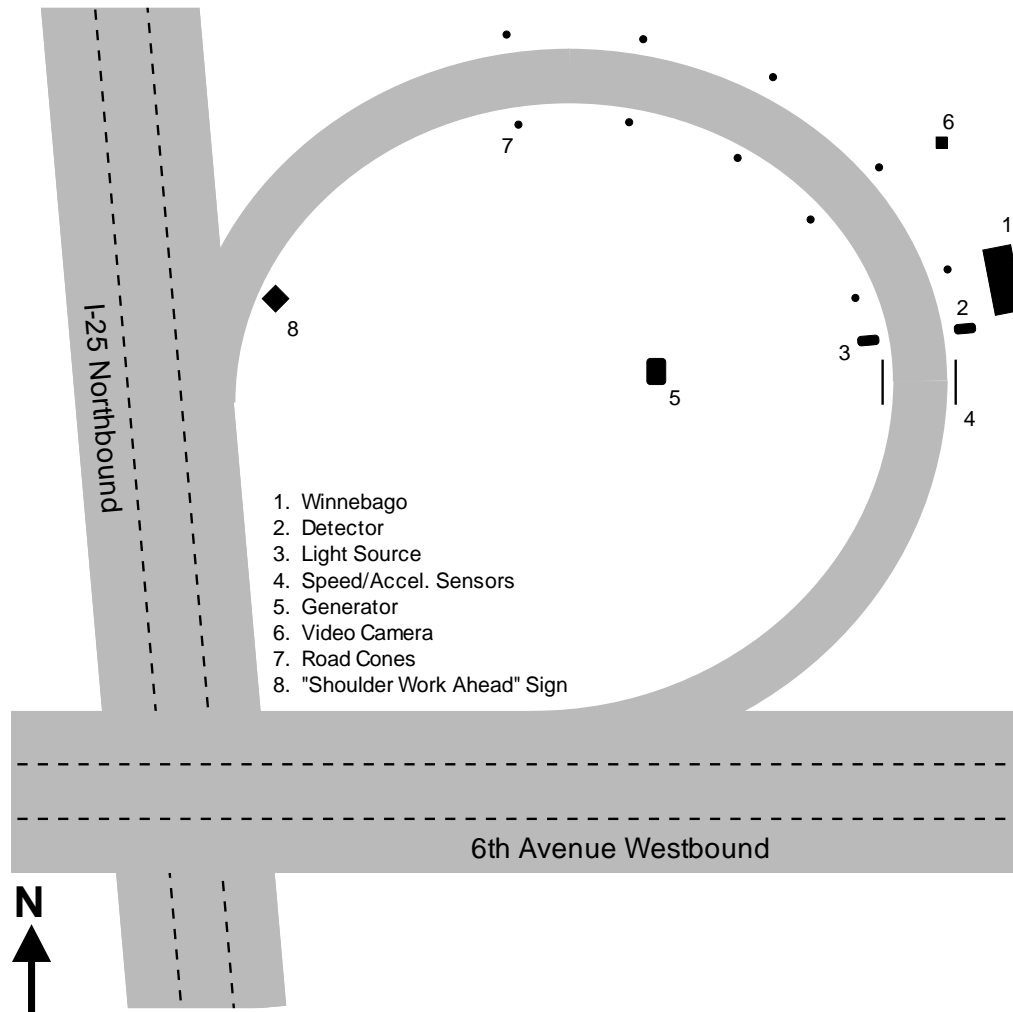


Figure 1. Area map of the interchange from I-25 northbound to 6th Avenue westbound in central Denver, showing remote sensor configuration and safety equipment.

terms are included in Appendix B. The temperature and humidity record is included in Appendix C.

The validity of the attempted measurements is summarized in Table 1. The table describes the data reduction process beginning with the number of attempted measurements and ending with the number of records containing both valid emissions measurements and vehicle registration information. An attempted measurement is defined as a beam block followed by a half second of data collection. If the data collection period is interrupted by another beam block from a close following vehicle, the measurement attempt is aborted and an attempt is made at measuring the second vehicle. In this case, the beam block from the first vehicle is not recorded as an attempted measurement. Invalid measurement attempts arise when the vehicle plume is highly diluted, or the reported error in the ratio of the pollutant to CO₂ exceeds a preset limit (see Appendix A). The percent validity of the 2007 measurements is very similar to the validity seen in the previous years at this site, with approximately 76% of attempted measurements being valid and plate matched. The additional losses are from the usual sources such as trailer



Figure 2. Picture of the 6th Avenue measurement site looking northwest.

Table 1. Data Collection Summary.

	CO	HC	NO
Attempted Measurements	28,140		
Valid Measurements	27,459	27,426	27,433
Percent of Attempts	97.6%	97.5%	97.6%
Submitted Plates	22,628	22,613	22,609
Percent of Attempts	80.4%	80.4%	80.4%
Percent of Valid Measurements	82.4%	82.5%	82.4%
Matched Plates	21,477	21,462	21,458
Percent of Attempts	76.3%	76.3%	76.3%
Percent of Valid Measurements	78.2%	78.3%	78.2%
Percent of Submitted Plates	94.9%	94.9%	94.9%

hitches and winter grime that obscures the license plate.

Table 2 provides an analysis of the number of vehicles that were measured repeatedly, and the number of times they were measured. Of the 21,477 records used in this fleet analysis, 16,769 (78%) were contributed by vehicles measured once, and the remaining 4,708 (22%) records were from vehicles measured at least twice. The Denver site has fewer repeat measurements because it is a high volume site requiring fewer measurement

Table 2. Number of measurements of repeat vehicles.

Number of Times Measured	Number of Vehicles
1	16,769
2	1,784
3	344
4	21
5	2
>5	2

days and this year the days were widely spaced due to weather.

Table 3 is the data summary; included is the summary of the previous remote sensing databases collected by the University of Denver at this site. The 1999, 2000, 2001, 2003, 2005 and 2007 measurements were collected as part of this multi-year CRC study. The measurements conducted in January of 1996 and 1997 were part of a separate study and are included here for comparison.^{9,10}

The average HC values here have been adjusted for comparison purposes only to remove an artificial offset in the measurements. This offset, restricted to the HC channel, has been reported in earlier CRC E-23-4 reports. Calculation of the offset is accomplished by computing the mode and means of the newest model year vehicles and assuming these vehicles emit negligible levels of hydrocarbons, using the lowest of either of these values as the offset. The offset is then subtracted from all of the hydrocarbon data. Since we assume the cleanest vehicles to emit little hydrocarbons, such an adjustment will only err slightly towards clean because the true offset will be a value somewhat less than the average of the cleanest model year and make. This adjustment facilitates comparisons with the other E-23 sites and/or different collection years for the same site. The data for this year did not have a measurable offset and therefore no adjustments have been made to this year's HC data.

Figure 3 shows the distribution of CO, HC, and NO emissions by percent category from the data collected in this study. The solid bars show the percentage of the fleet in a given emission category, and the gray bars show the percentage of the total emissions contributed by that category. This figure illustrates the skewed nature of automobile emissions; the lowest emission category for each of three pollutants is occupied by no less than 83% of the measurements (for NO). The lowest emission categories for CO and NO contain 96% and 91% of the measurements, respectively. The fact that the cleanest 96% of the measurements are responsible for only 45% of the CO emissions further demonstrates how the emissions picture can be dominated by a small number of high emitters. This skewed distribution was also seen in all of the previous years and is reflected in the high values of percent of total emissions from the dirtiest 10% of the data (see Table 3).

The inverse relationship between vehicle emissions and model year has been observed at a number of locations around the world, and Figure 4 shows that the fleet in the Denver

Table 3. Data Summary.

Study Year	1996	1997	1999	2000	2001	2003	2005	2007
Mean CO (%) (g/kg of fuel)	0.53	0.51	0.45 (56)	0.43 (54)	0.34 (43)	0.35 (44)	0.23 (29)	0.19 (24)
Median CO (%)			0.09	0.11	0.06	0.08	0.05	0.05
Percent of Total CO from Dirtiest 10% of the Data	63.8	67.0	66.3	65.3	73.2	68.9	71.0	73.0
Mean HC (ppm)* (g/kg of fuel)* Offset (ppm)	180 70	160 100	125 (5.0) 5	115 (4.6) 60	112 (4.6) -50	88 (3.4) 20	50 (1.9) 10	46 (1.8) 0
Median HC (ppm)*			75	50	80	40	20	30
Percent of Total HC from Dirtiest 10% of the Data	77.5	72.5	66.0	77.6	77.2	74.8	81.4	92.3
Mean NO (ppm) (g/kg of fuel)	860 [†]	620 [†]	600 (8.4)	511 (7.2)	483 (6.8)	456 (6.5)	371 (5.3)	278 (4.0)
Median NO (ppm)			240	165	133	113	76	40
Percent of Total NO from Dirtiest 10% of the Data	38.1	43.6	44.6	48.4	51.7	53.5	58.0	63.1
Mean Model Year	1989.2	1990.3	1992.4	1993.4	1994.6	1996.4	1998.1	2000
Mean Speed (mph)	21.9	21.8	20.6	21.9	22.3	20.2	23.5	22.5
Mean Acceleration (mph/s)	-0.23	0.13	0.21	0.08	-0.77	0.12	-0.47	0.07
Mean VSP (kw/tonne) Slope (degrees)	8.6 4.6°	10.4 4.6°	9.9 4.6°	10.1 4.6°	5.9 4.6°	10.7 4.6°	8.1 4.6°	10.4 4.6°

*Indicates values that have been HC offset adjusted as described in text.

† NO measurements made with a non-dispersive UV absorption channel. See Zhang *et al.*¹¹

area, during all six years of measurement, is not an exception. Unlike the other E-23 sites, the Denver gNO/kg emissions do not appear to level off after the 1989 model year. This is perhaps due to the larger grade at this site. As seen at the other E-23 sites, the Denver data show that vehicle deterioration is slowing even for tailpipe NO emissions. Unlike data collected in Chicago from 1997-1999, the Denver measurements do not show a tendency for the mean and median emissions to increase significantly for the “newest” model year. In Colorado vehicles are required to be replated when the title is transferred, as a result there is no migration of plates from older to newer vehicles in the months between measurement and plate matching.

Plotting vehicle emissions by model year, with each model year divided into emission

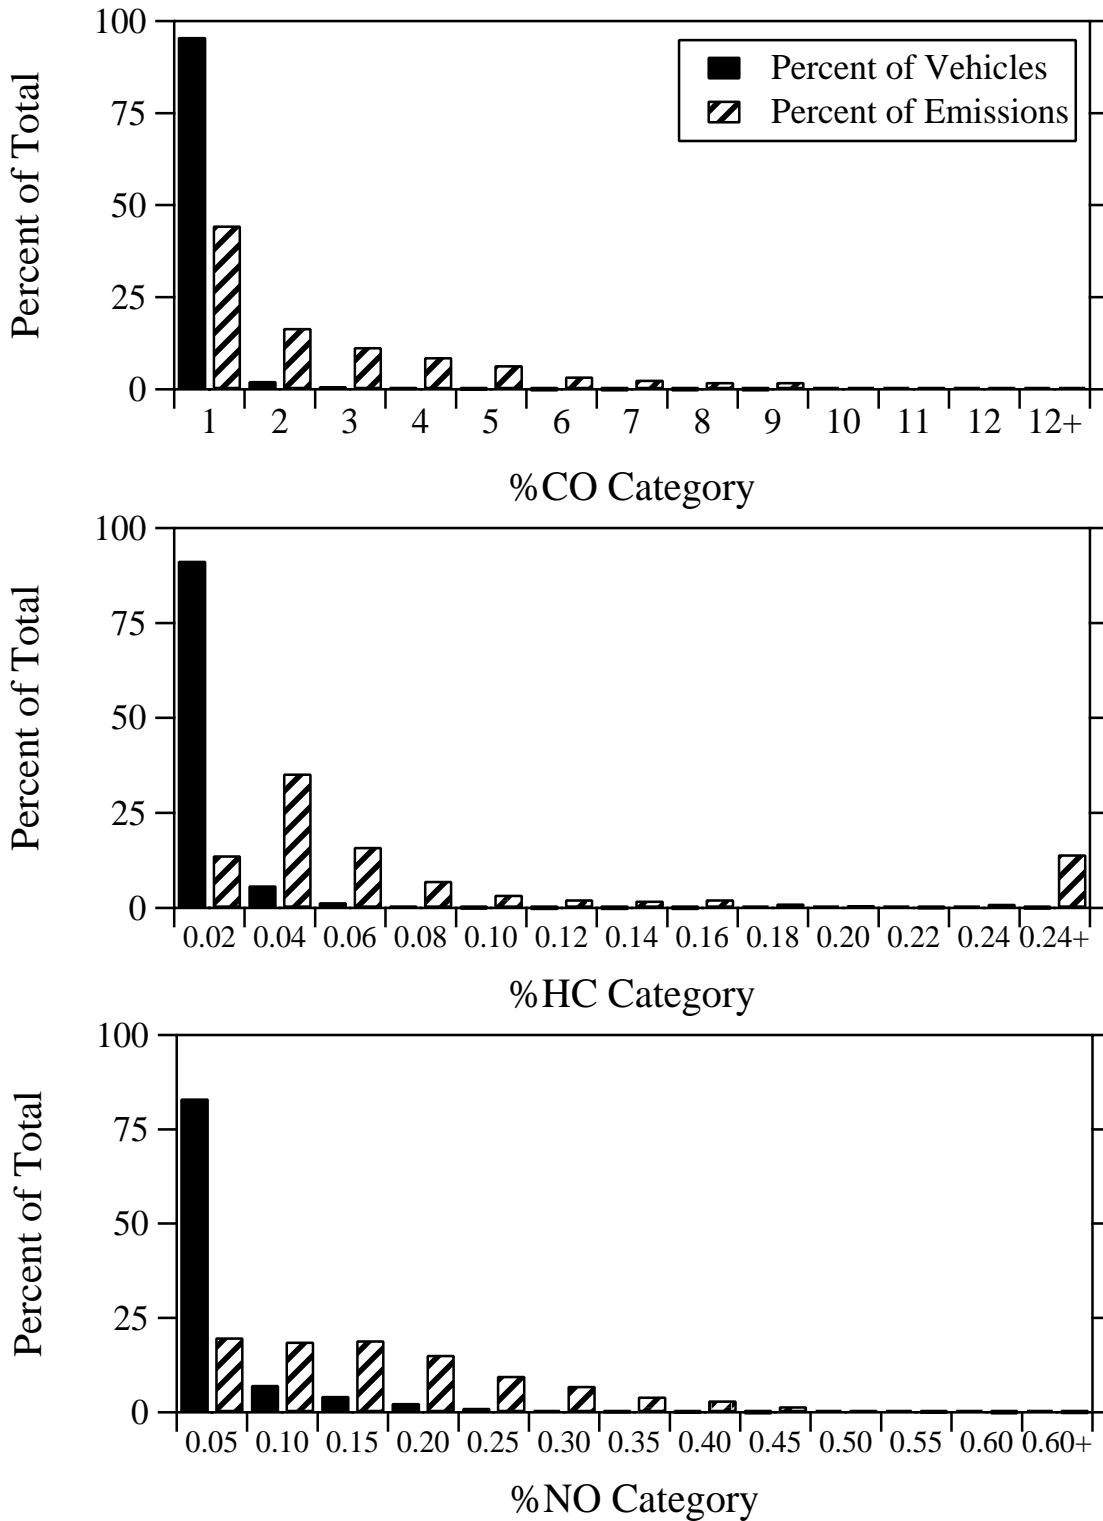


Figure 3. Emissions distribution showing the percentage of the fleet in a given emission category (black bars) and the percentage of the total emissions contributed by the given category (hatched bars).

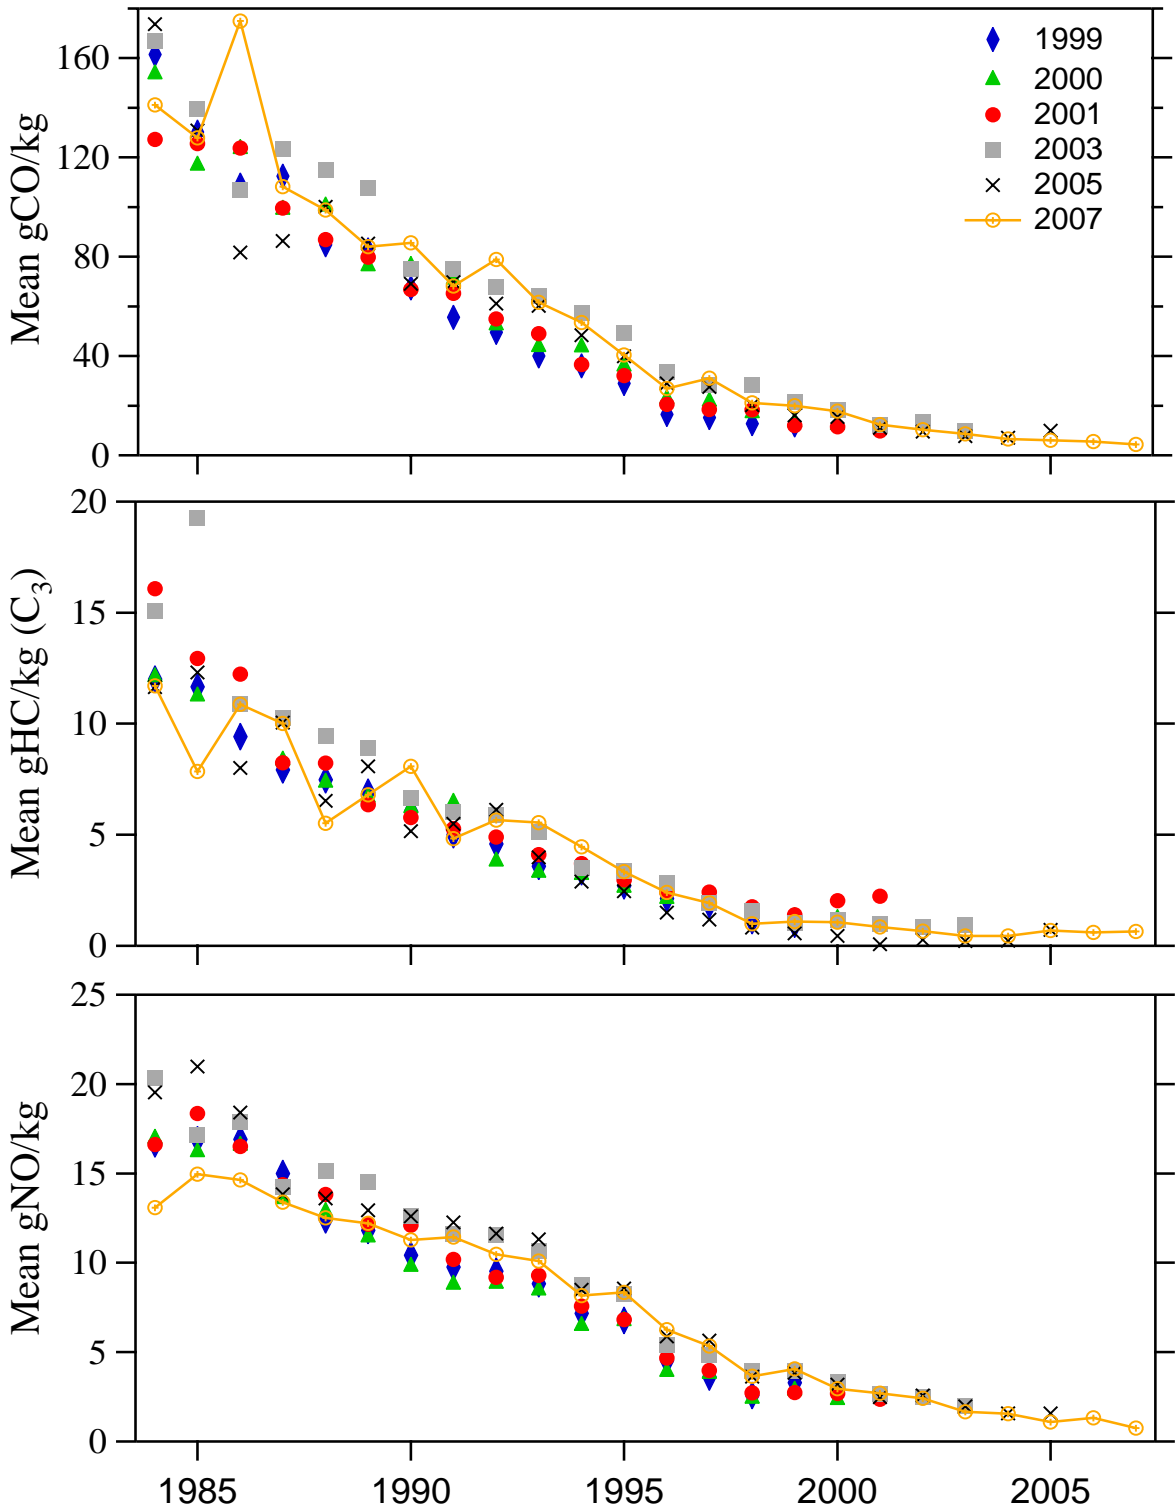


Figure 4. Mean vehicle emissions illustrated as a function of model year.

quintiles results in the plots shown in Figures 5 - 7. Very revealing is the fact that, for all three major pollutants, the cleanest 60% of the measurements, regardless of model year, make an essentially negligible contribution to the total emissions. This observation was first reported by Ashbaugh, *et al.*¹² These plots also show that even though older model years have higher average emissions, the numerical superiority of newer models dominate the fraction of emissions. Figures 3 and 6 highlight the decreasing HC emission levels where approximately 80% of the measurements now have HC emission readings that are zero \pm instrument noise. The results shown here continue to demonstrate that broken emissions control equipment has a greater impact on fleet emissions than vehicle age.

An equation for determining the instantaneous power of an on-road vehicle has been proposed by Jimenez¹³, which takes the form

$$SP = 4.39 \cdot \sin(\text{slope}) \cdot v + 0.22 \cdot v \cdot a + 0.0954 \cdot v + 0.0000272 \cdot v^3$$

where SP is the vehicle specific power (VSP) in kW/metric tonne, *slope* is the slope of the roadway (in degrees), *v* is vehicle speed in mph, and *a* is vehicle acceleration in mph/s. Using this equation, VSP was calculated for all measurements in the database. The emissions data were binned according to VSP, and illustrated in Figure 8. The solid line in the figure provides the number of measurements in each bin for the 2007 data. The 2007 data show the least dependence on VSP of any of the previous data sets. All of the species are remarkably flat across the VSP range with only slight rises at the VSP levels that in past years showed larger increases. These observations are probably the result of a number of factors that influence vehicle emissions. This could possibly include the continued improvement in emissions systems durability and lower national tailpipe standards through the 50-state certification program.

Using VSP, it is possible to eliminate some of the remaining influence of load and of driving behavior from the mean vehicle emissions for the 1999, 2000, 2001, 2003, 2005 and 2007 databases. Table 4 shows the mean emissions from vehicles in the 1999, 2000, 2001, 2003, 2005 and 2007 with specific powers between -5 and 20 kW/tonne. Note that these emissions do not vary considerably from the mean emissions for the entire databases, as shown in Table 3. This correction is accomplished by applying the mean vehicle emissions for each specific power bin in Figure 8 for each measurement year, to the vehicle distribution by specific power, for each bin from 1999. A sample calculation, for the specific power adjusted mean NO emissions in Chicago in 1998, is shown in Appendix D. The uncertainty values in the table are standard errors of the means determined from the daily averages. Table 4 shows the mean VSP adjusted emissions during the six years have been steadily decreasing since the 1999 data set. The current measurements are the lowest to date, most likely due to the robust emissions durability of the newer model year vehicles entering the Denver fleet.

A correction similar to the VSP adjustment can be applied to a fleet of specific model year vehicles to look at model year deterioration, provided we use as a baseline only model years measured in the 1999 study. This restriction reduces the number of vehicles in the calculation for each subsequent year and that fleet size is listed at the bottom of the table. Table 5 shows the mean emissions for all vehicles from model years 1984 to 1999,

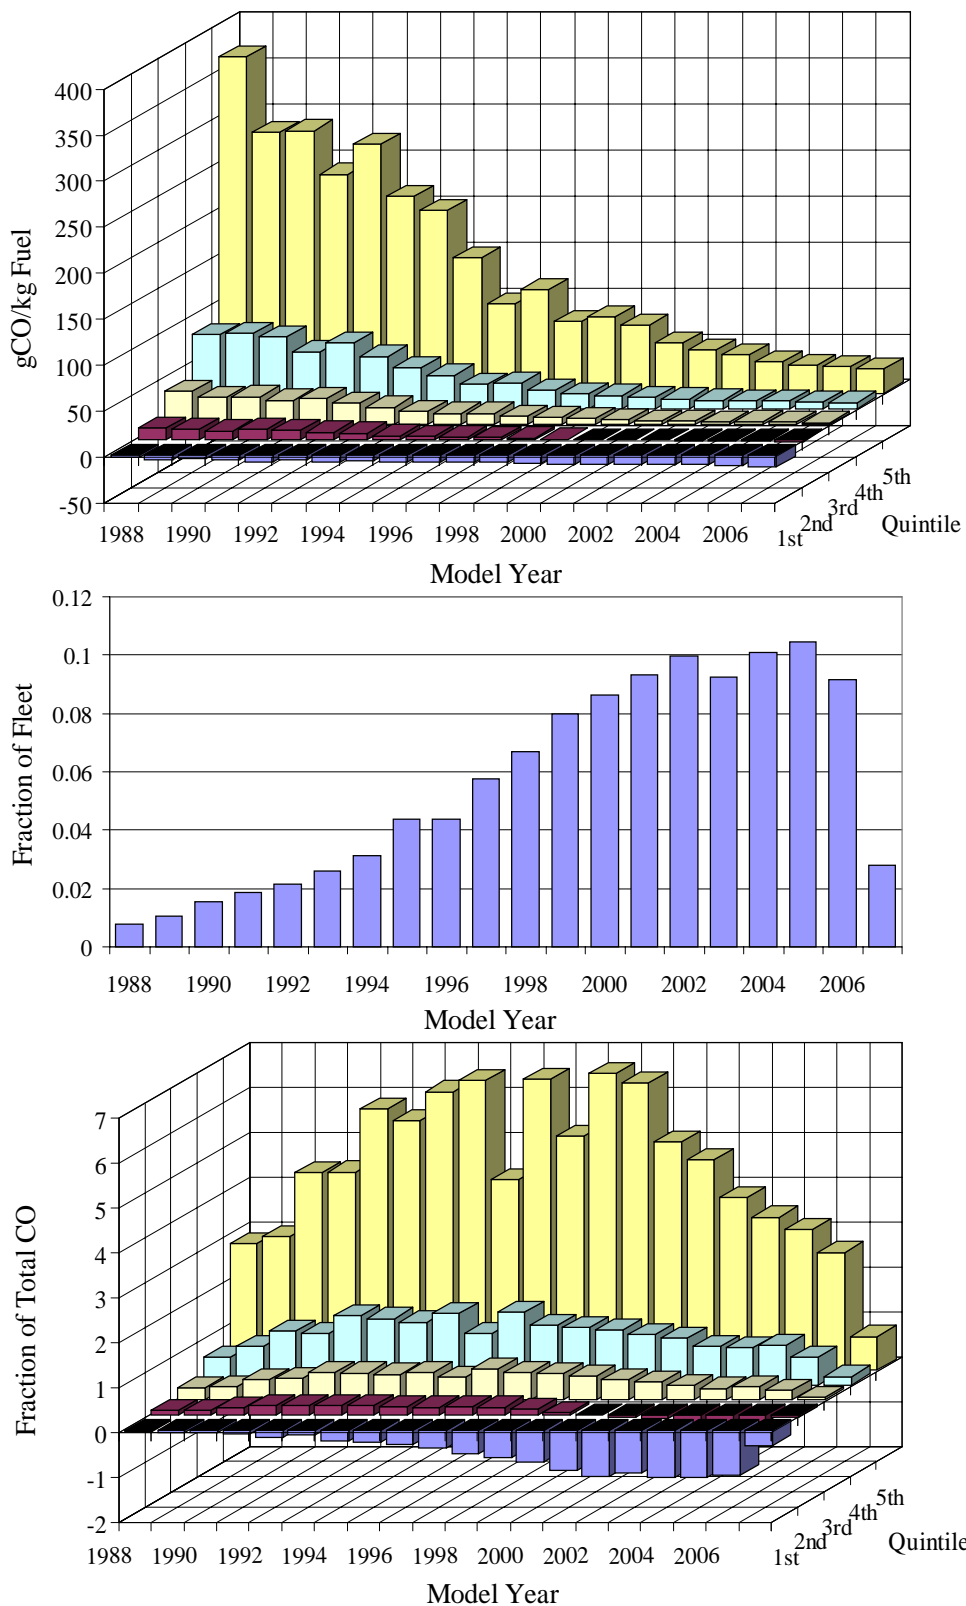


Figure 5. 2007 CO emissions by model year and quintile (top), fleet distribution (middle) and their product showing the total fractional CO emissions by model year and quintile (bottom).

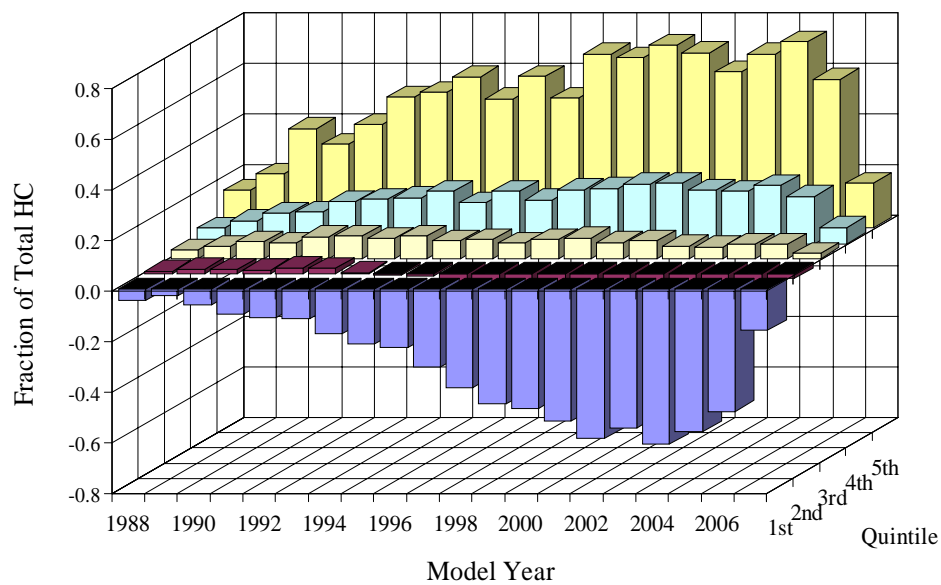
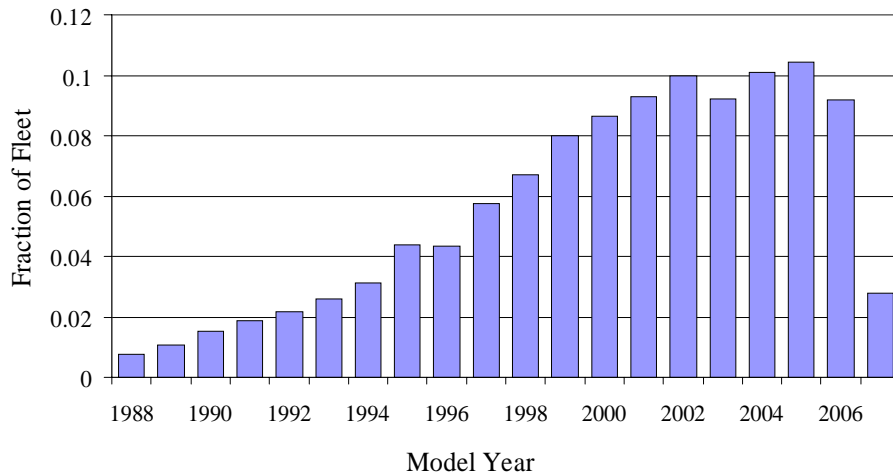
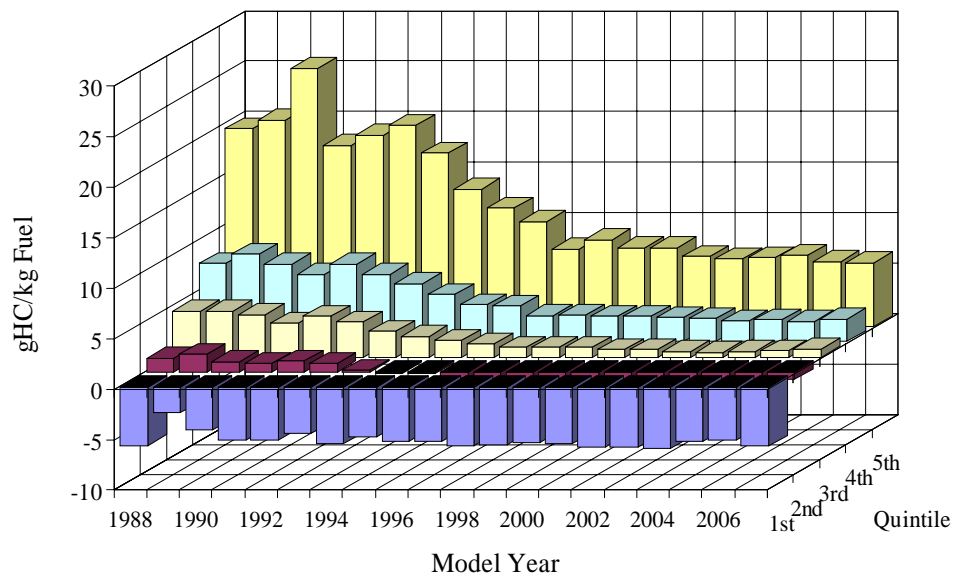


Figure 6. 2007 HC emissions by model year and quintile (top), fleet distribution (middle) and their product showing the total fractional HC emissions by model year and quintile (bottom).

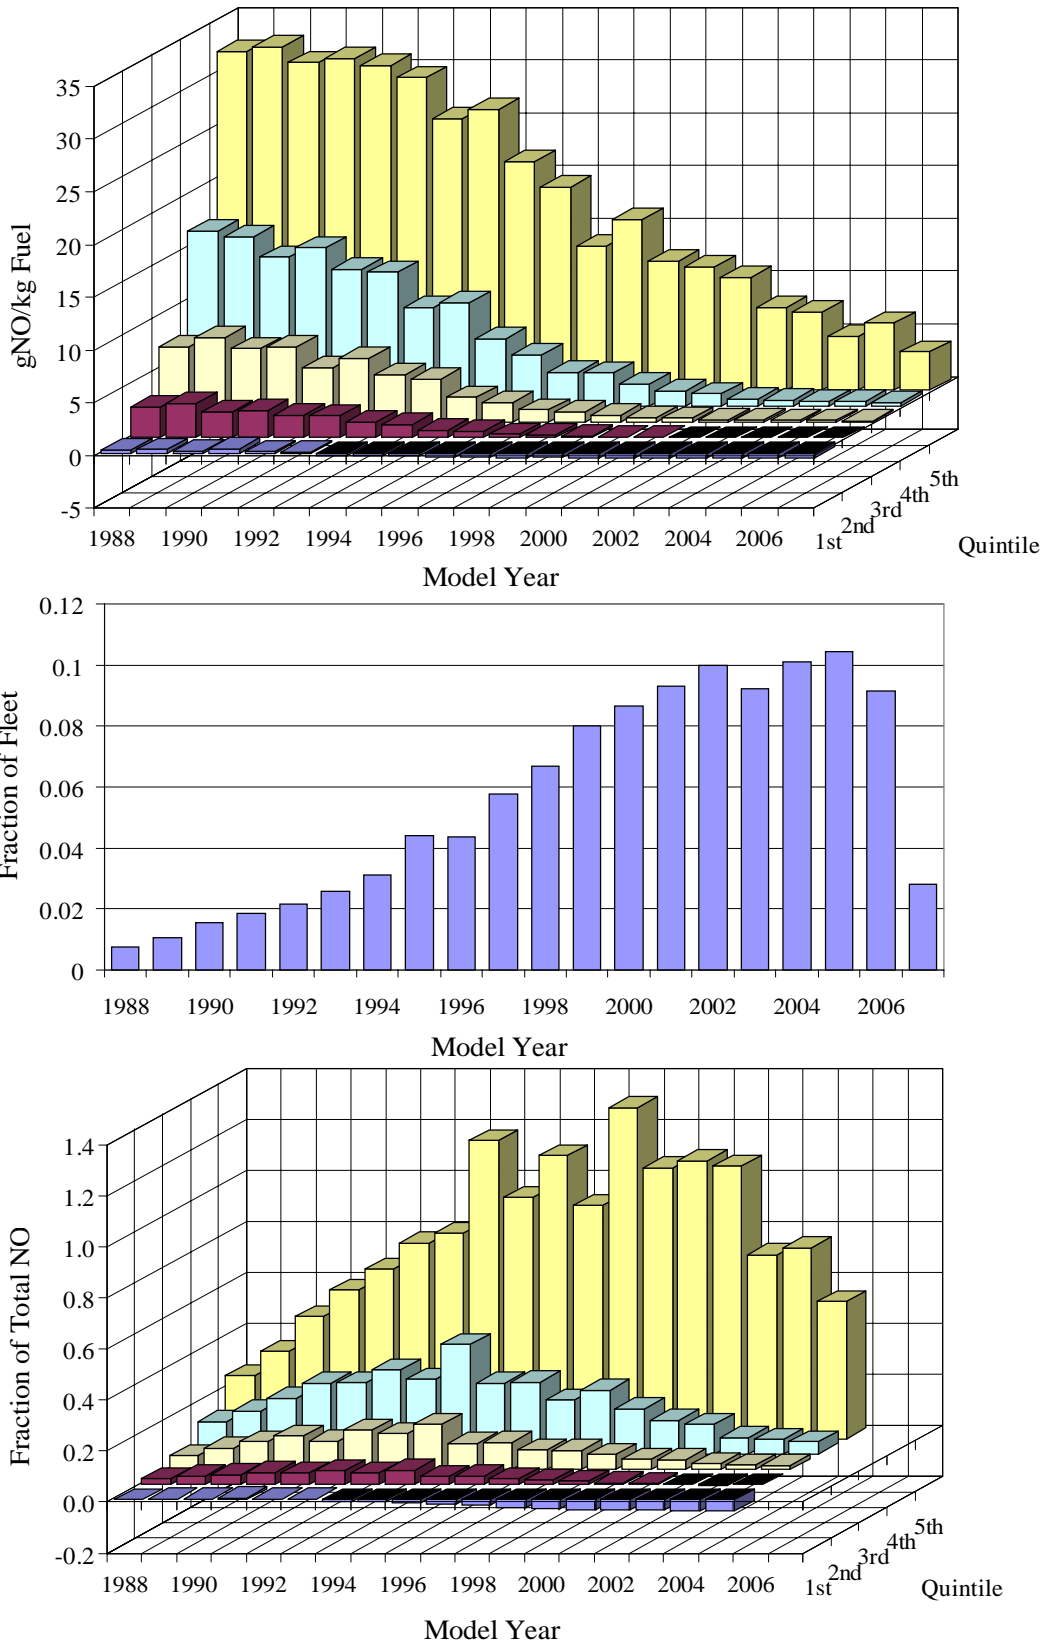


Figure 7. 2007 NO emissions by model year and quintile (top), fleet distribution (middle) and their product showing the total fractional NO emissions by model year and quintile (bottom).

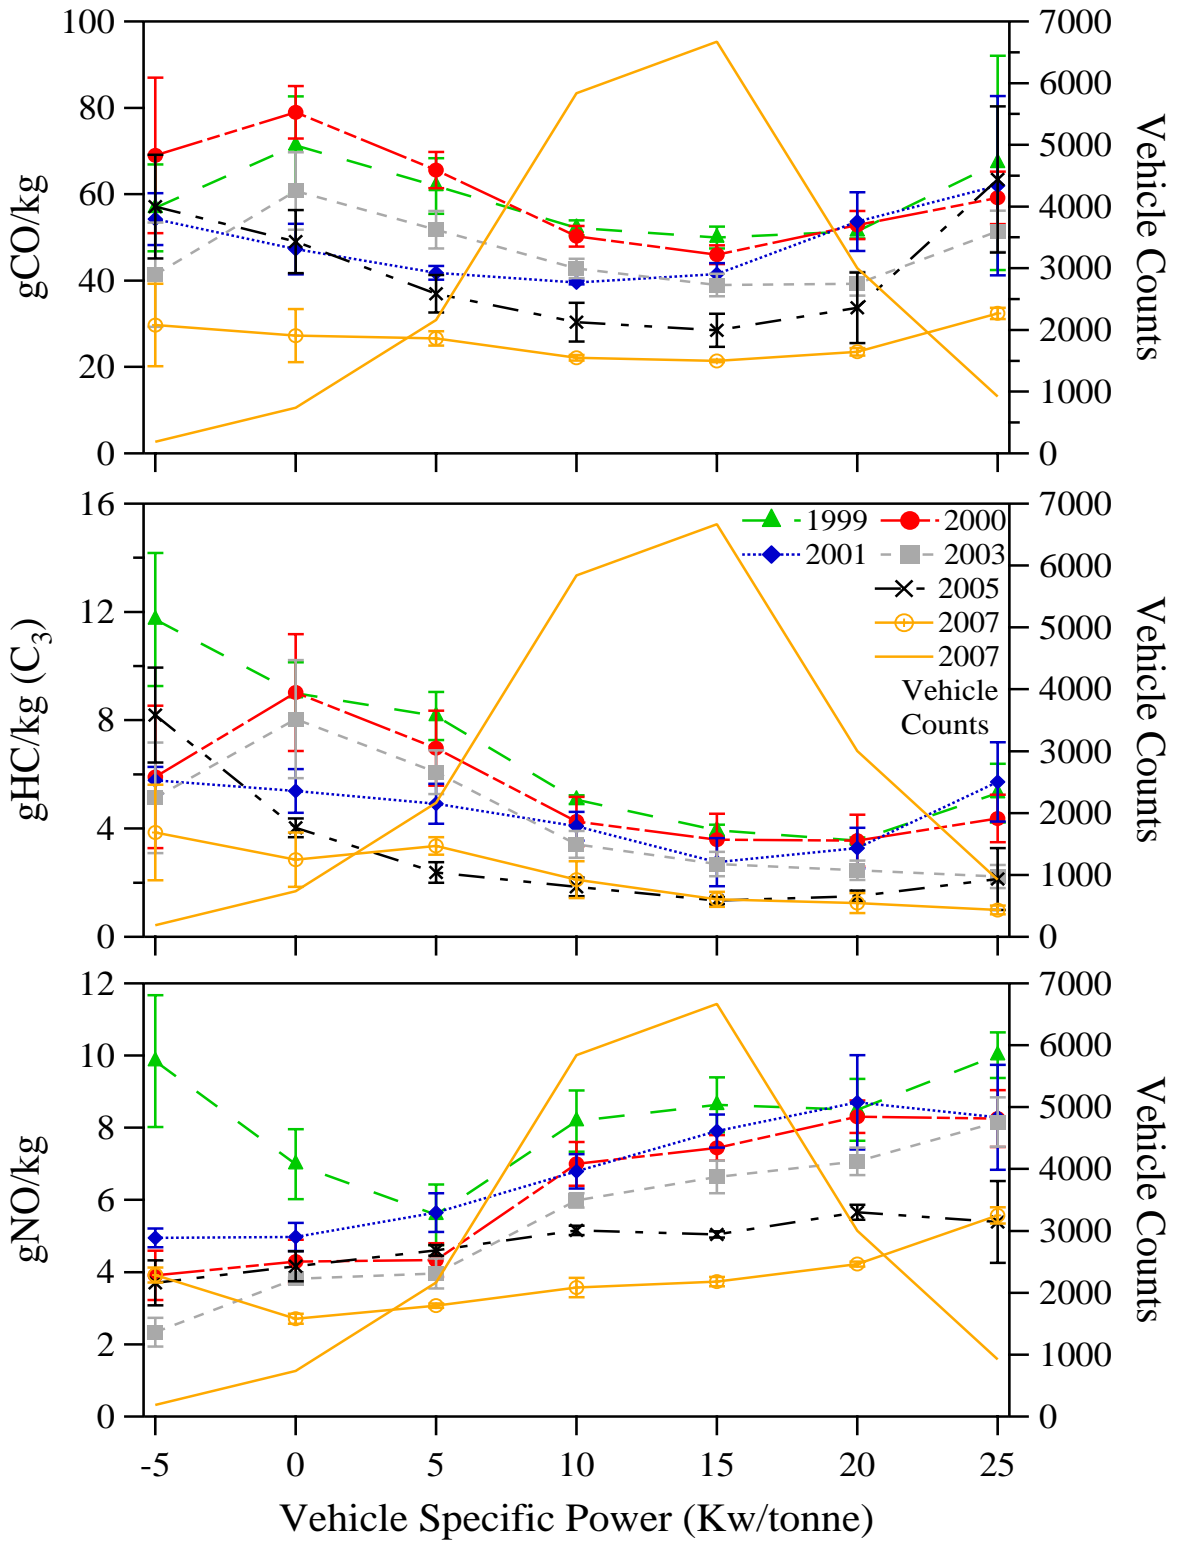


Figure 8. Vehicle emissions are plotted as a function of vehicle specific power for the entire Denver E-23 data sets. Error bars are standard errors of the mean calculated from daily samples. The solid line without markers is the vehicle count profile for the 2007 data set.

Table 4. Vehicle specific power adjusted fleet emissions (-5 to 20 kW/tonne only) with standard error of the means calculated using daily averages.

	1999 measured (adjusted)	2000 measured (adjusted)	2001 measured (adjusted)	2003 measured (adjusted)	2005 measured (adjusted)	2007 measured (adjusted)
Mean gCO/kg	52.4 ± 2.1 (52.4 ± 2.1)	51.2 ± 2.8 (51.0 ± 2.8)	41.8 ± 0.8 (42.2 ± 0.9)	42.0 ± 1.9 (42.2 ± 1.9)	28.3 ± 0.7 (31.1 ± 0.7)	22.9 ± 0.6 (22.6 ± 0.5)
Mean gHC/kg ^a	5.0 ± 0.2 (4.9 ± 0.2)	6.8 ± 0.9 (4.3 ± 0.9)	2.0 ± 0.6 (3.6 ± 0.5)	4.2 ± 0.4 (3.4 ± 0.4)	2.3 ± 0.3 (1.7 ± 0.3)	1.9 ± 0.5 (1.9 ± 0.5)
Mean gNO/kg	8.1 ± 0.7 (8.1 ± 0.7)	7.0 ± 0.4 (7.0 ± 0.4)	6.6 ± 0.5 (7.3 ± 0.6)	6.2 ± 0.2 (6.1 ± 0.2)	5.0 ± 0.1 (5.1 ± 0.1)	3.6 ± 0.1 (3.6 ± 0.1)

^aHC emissions are offset adjusted for all years.

Table 5. Model year adjusted fleet emissions (MY 1984-1999 only). Errors are standard error of the means calculated using the daily means.

	1999 Measured (Adjusted)	2000 Measured (Adjusted)	2001 Measured (Adjusted)	2003 Measured (Adjusted)	2005 Measured (Adjusted)	2007 Measured (Adjusted)
Mean gCO/kg	45.8 ± 1.5 (45.8 ± 1.5)	45.9 ± 2.2 (50.8 ± 2.5)	41.0 ± 1.6 (48.2 ± 1.9)	51.9 ± 1.9 (62.5 ± 2.3)	41.5 ± 0.5 (54.0 ± 0.6)	43.6 ± 1.4 (59.7 ± 1.9)
Mean gHC/kg ^a	4.3 ± 0.2 (4.1 ± 0.2)	6.3 ± 0.9 (4.2 ± 1.0)	1.8 ± 0.5 (4.6 ± 0.6)	4.9 ± 0.5 (5.1 ± 0.6)	3.2 ± 0.2 (4.0 ± 0.3)	3.2 ± 0.5 (4.5 ± 0.7)
Mean gNO/kg	7.9 ± 0.6 (7.9 ± 0.6)	6.9 ± 0.4 (7.5 ± 0.4)	7.2 ± 0.6 (8.2 ± 0.7)	8.0 ± 0.3 (9.4 ± 0.4)	7.7 ± 0.1 (9.5 ± 0.1)	7.0 ± 0.1 (8.7 ± 0.1)
Number of Vehicles	24,588	21,138	16,678	13,716	10,132	8,227

^aHC emissions are offset adjusted for all of the years adjusted data.

as measured in 1999, 2000, 2001, 2003, 2005 and 2007. Applying the vehicle distribution by model year from 1999 to the mean emissions by model year from each of the other three years of measurement yields the model year adjusted fleet emissions. What deterioration that is occurring in this fleet is small with only the CO emissions showing an increase that is outside the error limits given. The HC and now the NO emissions have flattened out and do not show a statistically significant deterioration effect. An expanded sample calculation, for the model year adjusted mean NO emissions in Chicago in 1998, is shown in Appendix E.

Vehicle deterioration can also be illustrated by Figure 9, which shows the mean emissions of the 1984 to 2007 model year fleet as a function of vehicle age. The first point for each model year was measured in 1999, the second in 2000, the third in 2001, the fourth in 2003 the fifth in 2005 and the sixth in 2007. Vehicle age is determined by the difference between the year of measurement and the vehicle model year. Since the Denver measurements are taken half way into a new vehicle model year, each studies newest model year is assumed to be one year old. As more data are collected, what is most striking is how the first four to six years of age the mean CO and HC show very small

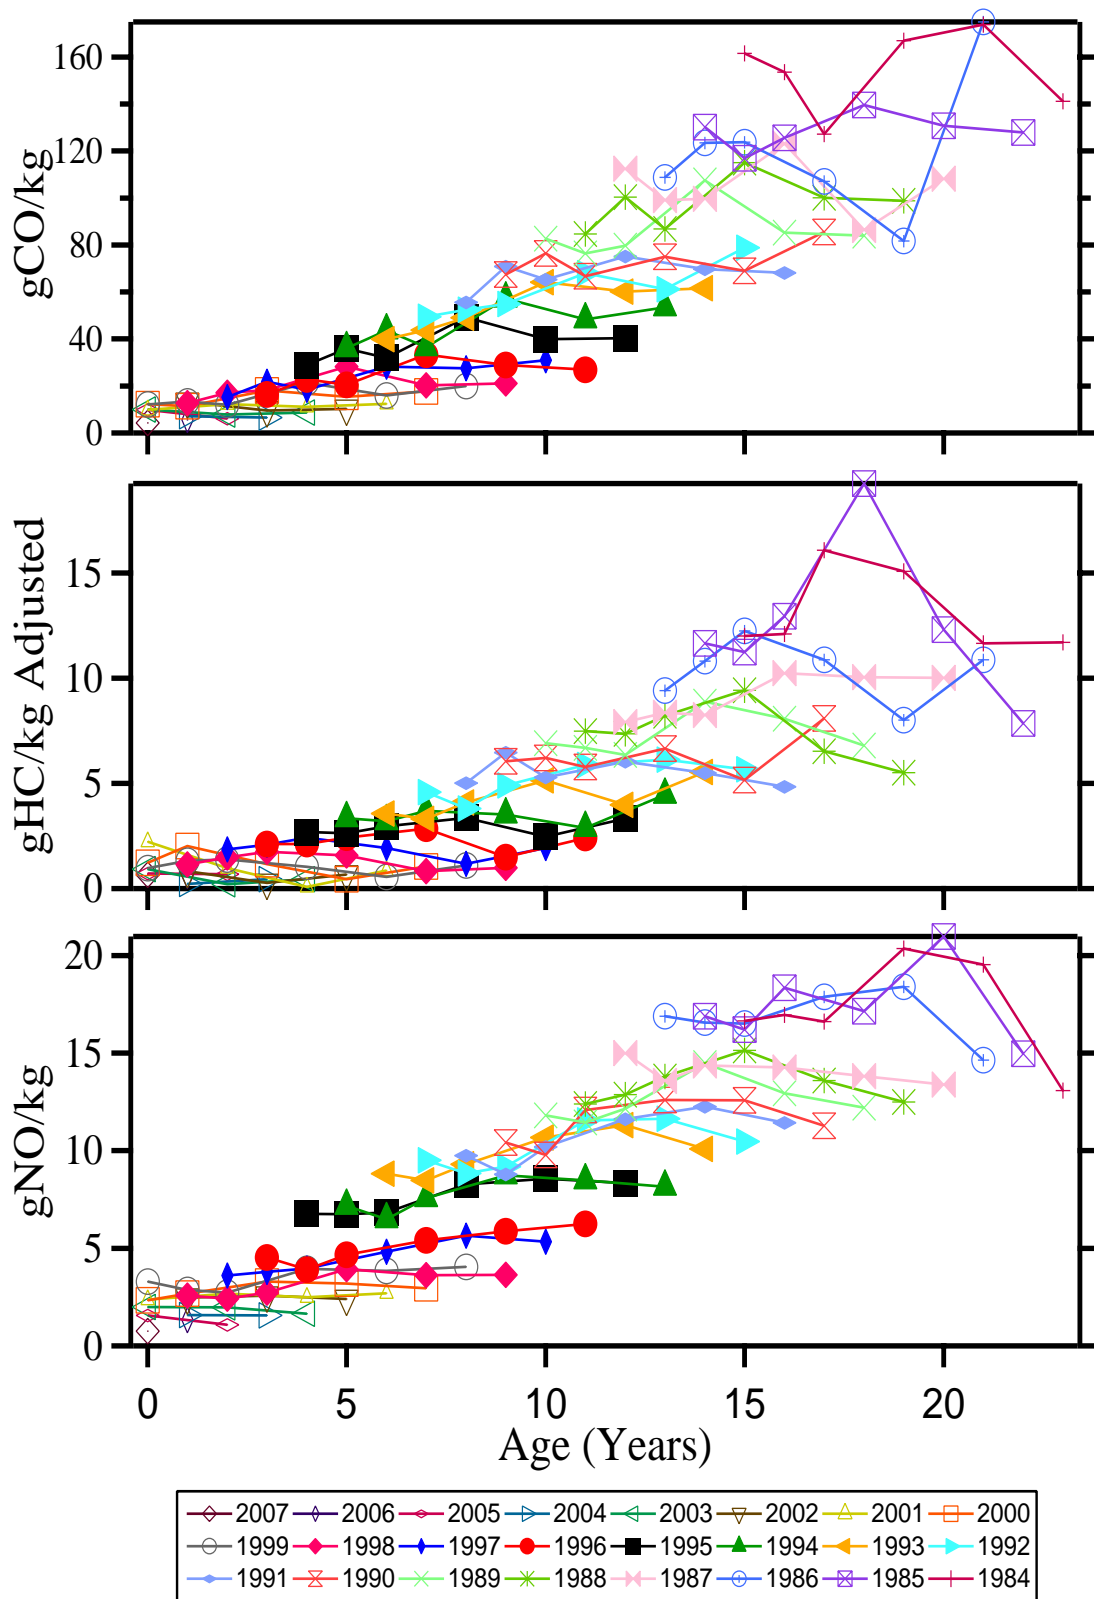


Figure 9. Mean vehicle emissions as a function of age, shown by model year. Included are data collected from the site in 1999, 2000, 2001, 2003, 2005 and 2007.

amounts if any emissions deterioration. With the current data set, NO emissions are starting to appear to flatten out in the first 5 years of age.

Another use of the on-road remote sensing data is to predict the abundance of vehicles that are high emitting for more than one pollutant measured. One can look at the high CO emitters and calculate what percent of these are also high HC emitters, for example. This type of analysis would allow a calculation of HC emission benefits resulting from fixing all high CO emitters. To this extent, we have analyzed our data to determine what percent of the top decile of emitters of one pollutant are also in the top decile for another.

These data are in Table 6; included in the analysis are only those vehicles that have valid readings for all three pollutants. The column heading is the pollutant whose top decile is being analyzed, and the values indicate what percentage of the data are high emitters only for the pollutants in the column and row headings. Where the column and row headings are the same, the values indicate the percentage that is high emitting in only that pollutant. The “All” row gives the percentage of the data that are high emitting in all three pollutants. Thus 2.7% of the measurements are in the top decile for both HC and CO but not for NO; 0.8% are high emitting for CO and NO but not for HC; 5.3% are only high CO emitters.

Table 6. Percent of all measurements that are high emitting.

Top 10% Decile	CO	HC	NO
CO	5.3%	2.7%	0.8%
HC	2.7%	5.0%	1.1%
NO	0.8%	1.1%	6.9%
All	1.2%		

The preceding analysis gives the percent of vehicle overlap but does not directly give emissions overlap. In order to assess the emissions overlap one must convert the Table 6 values to percent of emissions. Table 7 shows that identification of all measurements that are high emitting for CO would identify an overall 34% of HC and 5% of NO. More efficiently, identification of the 2.7% high CO and HC vehicles accounts for 31.7% of the total CO and 34% of the total on-road HC from these data.

Table 7. Percent of total emissions from high emitting vehicles.

Top 10% Decile	CO	HC	NO
CO	30.9%	34.0%	5.0%
HC	31.7%	37.2%	7.5%
NO	3.9%	9.6%	42.6%
All	6.9%	11.6%	8.0%

Most vehicles are low emitting and show little emissions variability when measured more than once. Vehicles that have one high reading often have other readings that vary widely.¹⁴ This effect has also been observed from multiple FTP and IM240 tests. The evidence from pullover studies in California is that even one high reading identifies vehicles that have a >90% probability of failing an alternative I/M test if performed immediately. These vehicles also have a high probability of showing evidence of tampered or defective emission control equipment.⁷ Because of this variability in the emissions of broken cars, the emissions distribution obtained from any snapshot of fleet emissions (remote sensing or annual I/M testing) is bound to be more skewed than were one able to monitor the emissions of all vehicles at all times. This phenomenon does not effect the means measured by these snapshots but it does imply that the overlap and high emitter fractions in the tables above would show less skewness were one able to fully characterize all vehicles and their variability.

In the manner described in the Phoenix, Year 2 report¹⁵, instrument noise was measured by looking at the slope of the negative portion of the log plots. Such plots were constructed for the three pollutants. Linear regression gave best fit lines whose slopes correspond to the inverse of the Laplace factor, which describes the noise present in the measurements. This factor must be viewed in relation to the average measurement for the particular pollutant to obtain a description of noise. The Laplace factors were 5.3, 3.4, and 0.3 for CO, HC and NO, respectively. These values indicate standard deviations of 7.6 g/kg (0.06%), 4.7 g/kg (115 ppm) and 0.4 g/kg (39 ppm) for individual measurements of CO, HC and NO, respectively. These levels are consistent with the low noise level as discussed in a previous Phoenix report.¹⁵ In terms of uncertainty in average values reported here, the numbers are reduced by a factor of the square root of the number of measurements. For example, with averages of 100 measurements, which is the low limit for number of measurements per bin, the uncertainty reduces by a factor of 10. Thus, the uncertainties in the averages reduce to 0.8 g/kg, 0.5 g/kg, and 0.04 g/kg, respectively.

CONCLUSION

The University of Denver successfully completed the sixth year of a multi-year remote sensing study in Denver. Three days of fieldwork (January 10, 25 and February 27, 2007) were conducted on the uphill exit ramp from northbound Interstate 25 to westbound US 6 Denver, CO. A database was compiled containing 21,477 records for which the State of Colorado provided make and model year information. All of these records contained valid measurements for at least CO and CO₂, and 21,443 contained valid measurements for HC and NO as well. Of these measurements, 16,769 (78%) were of vehicles measured only once. The rest were of vehicles measured at least twice. Analysis of these repeat vehicles showed that high emitters have skewed emissions distributions while low emitters have more normally distributed emissions.

The mean measurements for CO, HC, and NO were determined to be 24 gCO/kg, 1.8 gHC/kg, and 4.0 gNO/kg, respectively with an average model year of 2000. As expected, the fleet emissions observed in this study exhibited a typical skewed distribution, with the dirtiest 10% of the fleet contributing 73%, 92%, and 63% of the CO, HC, and NO emissions, respectively. An analysis of emissions as a function of model year showed a

typical inverse relationship.

The 2007 data continues to show a decreasing dependence on VSP and are once again lower than any of the previous data sets. CO and HC emissions are at low levels across the entire VSP range. Using VSP, the emissions of the vehicle fleet measured in 2007 were adjusted to match the vehicle driving patterns of the fleet measured in 1999. All of the emissions continue to trend downward even at higher loads. This trend is more difficult to discern in the model year adjustments since the fleet has aged 9 years in the process and shrunk in size considerably. The increases observed in this analysis are just slightly larger than the estimated errors and point out that emission deterioration in the fleet is slowing considerably.

Tracking of model year fleets through six measurements indicates that the rate of emissions deterioration continues to slow. The observed increases in emissions only slightly exceeded the standard errors of the mean, despite the age of the fleet increasing by 9 years. An analysis of high emitting vehicles showed that there is considerable overlap of CO and HC high emitters, for instance 2.7% of the fleet emits 32% of the total CO and 34% of the total HC. The noise levels in the CO, HC and NO measurement channels were determined to be comparable to previous campaigns.¹⁵

ACKNOWLEDGEMENTS

The successful outcome of this project would not be possible without the assistance of the Colorado Department of Transportation, Ms. Mary Tuttle and Mr. Stan Paules of the Colorado Department of Revenue and Mrs. Annette Bishop whose plate reading skills are phenomenal.

LITERATURE CITED

1. *National Air Quality and Emissions Trends Report, 2003 Special Studies Edition*, United States Environmental Protection Agency, Research Triangle Park, NC, 2003; EPA-454/R-03-005.
2. Heywood, J.B. *Internal Combustion Engine Fundamentals*. McGraw-Hill: New York, 1988.
3. Lefohn, A.S.; Shadwick, D.S.; Ziman, S.D. *Environ. Sci. Technol.* **1998**, *32*, 276A.
4. Bishop, G.A.; Stedman, D.H. *Acc. Chem. Res.* **1996**, *29*, 489.
5. Popp, P.J.; Bishop, G.A.; Stedman, D.H. *J. Air & Waste Manage. Assoc.* **1999**, *49*, 1463.
6. Singer, B.C.; Harley, R.A.; Littlejohn, D.; Ho, J.; Vo, T. *Environ. Sci. Technol.* **1998**, *32*, 3241.
7. Lawson, D.R.; Groblicki, P.J.; Stedman, D.H.; Bishop, G.A.; Guenther, P.L. *J. Air & Waste Manage. Assoc.* **1990**, *40*, 1096.
8. Ashbaugh, L.L.; Lawson, D.R.; Bishop, G.A.; Guenther, P.L.; Stedman, D.H.; Stephens, R.D.; Groblicki, P.J.; Parikh, J.S.; Johnson, B.J.; Haung, S.C. In *PM10 Standards and Nontraditional Particulate Source Controls*; Chow, J.C., Ono, D.M., Eds.; AWMA: Pittsburgh, PA, 1992; Vol. II, pp. 720-739.
9. Stedman, D.H.; Bishop, G.A.; Aldrete, P.; Slott, R.S. *Environ. Sci. Technol.* **1997**, *31*, 927.
10. Stedman, D.H.; Bishop, G.A.; Slott, R.S. *Environ. Sci. Technol.* **1998**, *32*, 1544.
11. Zhang, Y.; Stedman, D.H.; Bishop, G.A.; Beaton, S.P.; Guenther, P.L.; McVey, I.F. *J. Air & Waste Manage. Assoc.* **1996**, *46*, 25.
12. Ashbaugh, L.L.; Croes, B.E.; Fujita, E.M.; Lawson, D.R. Presented at 13th North American Motor Vehicle Emissions Control Conference, 1990.
13. Jimenez, J.L.; McClintock, P.; McRae, G.J.; Nelson, D.D.; Zahniser, M.S. In *Proceedings of the 9th CRC On-Road Vehicle Emissions Workshop*, CA, 1999.
14. Bishop, G.A.; Stedman, D.H.; Ashbaugh, L.L. *J. Air Waste Manage. Assoc.*, **1996**, *46*:667-675.
15. Pokharel, S.S.; Bishop, G.A.; Stedman, D.H. *On-Road Remote Sensing of Automobile Emissions in the Phoenix Area: Year 2*, Final report to the Coordinating Research Council, Contract E-23-4, 2000.

APPENDIX A: FEAT criteria to render a reading “invalid” or not measured.

Not measured:

- 1) vehicle with less than 0.5 seconds clear to the rear. Often caused by elevated pickups and trailers causing a “restart” and renewed attempt to measure exhaust. The restart number appears in the data base.
- 2) vehicle which drives completely through during the 0.4 seconds “thinking” time (relatively rare).

Invalid :

- 1) insufficient plume to rear of vehicle relative to cleanest air observed in front or in the rear; at least five, 10ms $>160\text{ppmm CO}_2$ or $>400\text{ppmm CO}$. (0.2 % CO_2 or 0.5% CO in an 8 cm cell. This is equivalent to the units used for CO_2 max.) Often HD diesel trucks, bicycles.
- 2) too much error on CO/ CO_2 slope, equivalent to $\pm 20\%$ for %CO. >1.0 , 0.2%CO for %CO <1.0 .
- 3) reported %CO , $<-1\%$ or $>21\%$. All gases invalid in these cases.
- 4) too much error on HC/ CO_2 slope, equivalent to $\pm 20\%$ for HC $>2500\text{ppm}$ propane, 500ppm propane for HC $<2500\text{ppm}$.
- 5) reported HC $<-1000\text{ppm}$ propane or $>40,000\text{ppm}$. HC “invalid”.
- 6) too much error on NO/ CO_2 slope, equivalent to $\pm 20\%$ for NO $>1500\text{ppm}$, 300ppm for NO $<1500\text{ppm}$.
- 7) reported NO $<-700\text{ppm}$ or $>7000\text{ppm}$. NO “invalid”.

Speed/Acceleration valid only if at least two blocks and two unblocks in the time buffer and all blocks occur before all unblocks on each sensor and the number of blocks and unblocks is equal on each sensor and $100\text{mph}>\text{speed}>5\text{mph}$ and $14\text{mph/s}>\text{accel}>-13\text{mph/s}$ and there are no restarts, or there is one restart and exactly two blocks and unblocks in the time buffer.

A restart is an occurrence of a beam block within the 0.5 s exhaust data acquisition time. Data analysis is restarted using the clean air data collected in advance of the first blocking event. High clearance pickups typically generate one restart.

APPENDIX B: Explanation of the Den_2007.dbf database.

The Den_2007.dbf is a Microsoft FoxPro database file, and can be opened by any version of MS FoxPro. The file can be read by a number of other database management programs as well, and is available on CD-ROM or from www.feat.biochem.du.edu. The following is an explanation of the data fields found in this database:

License	Colorado license plate.
Date	Date of measurement, in standard format.
Time	Time of measurement, in standard format.
Percent_co	Carbon monoxide concentration, in percent.
Co_err	Standard error of the carbon monoxide measurement.
Percent_hc	Hydrocarbon concentration (propane equivalents), in percent.
Hc_err	Standard error of the hydrocarbon measurement.
Percent_no	Nitric oxide concentration, in percent.
No_err	Standard error of the nitric oxide measurement.
Percent_co2	Carbon dioxide concentration, in percent.
Co2_err	Standard error of the carbon dioxide measurement.
Opacity	Opacity measurement, in percent.
Opac_err	Standard error of the opacity measurement.
Restart	Number of times data collection is interrupted and restarted by a close-following vehicle, or the rear wheels of tractor trailer.
Hc_flag	Indicates a valid hydrocarbon measurement by a “V”, invalid by an “X”.
No_flag	Indicates a valid nitric oxide measurement by a “V”, invalid by an “X”.
Opac_flag	Indicates a valid opacity measurement by a “V”, invalid by an “X”.
Max_co2	Reports the highest absolute concentration of carbon dioxide measured by the remote sensor over an 8 cm path; indicates plume strength.
Speed_flag	Indicates a valid speed measurement by a “V”, an invalid by an “X”, and slow speed (excluded from the data analysis) by an “S”.
Speed	Measured speed of the vehicle, in mph.
Accel	Measured acceleration of the vehicle, in mph/s.
Ref_factor	Reference factor.
CO2_factor	CO2 factor.
Tag_name	File name for the digital picture of the vehicle.

Veh_type	Dmv plate type classification.
Vin	Vehicle identification number.
Year	Model year of the vehicle.
Make	Manufacturer of the vehicle.
Model	Model name of the vehicle.
Body	Dmv classified body style of the vehicle.
Series	Series code of vehicle.
Emiss_flag	I/M flag: 'Y', 'N', 'X'.
Legl_city	City the vehicle resides in.
Legal_St	State the vehicle resides in.
Legal_zip5	Zip code the vehicle resides in.
Mail_City	City of owner mailing address.
Mail_St	State of owner mailing address.
Mail_zip5	Zip code of owner mailing address.
County	County code where vehicle resides.
Urbn_rl_cd	Urban or rural designation where vehicle resides. 'R' is rural and 'U' is urban.
Purch_Date	Date vehicle was purchased.
Expire_Date	Date that current vehicle registration expires.
GVW	Gross vehicle weight.
Msrp	Manufacturer suggested retail price in US\$.
Odometer	Odometer reading during I/M inspection.
Fuel	Fuel type: 'G' indicates gasoline, 'D' indicates diesel.
E_Status	I/M status: 'P' is pass and 'E' is exempt.
Prog_Type	I/M type: 'E' is enhanced and 'B' is basic.
Test_date	I/M test date.
Next_insp	Due date for next inspection.
Prch_price	Price reported to DMV paid for the vehicle.
Salvg_flag	Signifies that vehicle has been totaled by an Insurance company.

APPENDIX C: Temperature and Humidity Data.

Denver 1999 Temperature Data							
1/14 Time	1/14 °F	1/15 Time	1/15 °F	1/18 Time	1/18 °F	2/1 Time	2/1 °F
14:16	57	9:25	47	8:30	40	8:00	26
15:50	56	9:45	48	9:30	45	8:33	30
		10:24	58	10:20	50	9:11	33
		11:08	58	10:50	55	9:29	33
		11:25	58	11:30	50	10:00	40
				12:00	46	10:25	46
						11:07	54
						11:56	55

Denver 1999/2000 Temperature and Humidity Data											
12/30 Time	12/30 °F	12/30 %RH	1/11 Time	1/11 °F	1/11 %RH	1/13 Time	1/13 °F	1/13 %RH	1/14 Time	1/14 °F	1/14 %RH
11:23	48	38	9:33	54	38	8:43	35	61	7:53	32	69
12:03	51	32	10:33	54	32	9:43	35	61	8:42	35	65
13:06	54	29	11:50	55	28	10:42	35	62	9:53	43	50
14:02	55	28	12:33	52	30	11:02	36	61	11:15	51	36
15:14	64	26	13:37	49	37	12:01	39	59			
16:00	57	26	14:37	50	39	13:09	41	56			
16:54	52	27	15:51	49	41	14:11	42	52			
			16:07	48	41	15:09	45	48			

Denver 2001 Temperature and Humidity Data									
1/5 Time	1/5 °F	1/5 %RH	1/6 Time	1/6 °F	1/6 %RH	1/8 Time	1/8 °F	1/8 %RH	
7:42	33	60	7:12	41	44	7:50	27	38	
8:57	37	59	8:13	42	46	10:18	43	28	
9:45	43	51	10:12	50	38	11:19	46	24	
11:49	59	28	11:30	51	38	12:27	51	21	
13:05	64	24	12:30	52	37	13:27	53	<20	
14:10	66	20	13:33	61	21	14:27	54	<20	
			14:43	61	<20	15:27	53	<20	
			15:47	61	25				

Denver 2002/2003 Temperature and Humidity Data											
12/31 Time	12/31 °F	12/31 %RH	1/7 Time	1/7 °F	1/7 %RH	1/8 Time	1/8 °F	1/8 %RH	1/31 Time	1/31 °F	1/31 %RH
9:45	34	31	9:05	43	38	9:27	48	32			
10:45	39	30	10:09	48	36	10:40	57	26	10:15	55	37
11:19	43	29	11:09	54	30	11:16	61	25	11:15	64	31
11:38	41	29	12:12	59	25	12:16	68	17	12:03	63	26
12:38	50	26	12:39	61	21	13:17	70	14	12:15	64	24
13:16	50	26	13:09	64	18	14:19	73	11	13:15	64	24
14:16	52	26	14:09	66	15	15:25	68	15			
15:16	52	26	15:09	68	15	15:50	66	15			
16:00	48	27	16:02	66	15						

Denver 2005 Temperature and Humidity Data									
1/8 Time	1/8 °F	1/8 %RH	1/10 Time	1/10 °F	1/10 %RH	1/11 Time	1/11 °F	1/11 %RH	1/11 %RH
12:06	52	34	8:44	41	51	8:00	37	77	77
13:22	54	33	9:11	36	65	9:01	39	77	77
14:06	55	33	10:11	37	64	10:03	37	76	76
15:06	54	34	11:11	45	57	11:01	41	70	70
16:06	50	36	12:11	45	53	12:25	46	56	56
			13:11	45	57	13:19	54	56	56
			14:16	48	50	14:19	39	72	72
			15:11	46	54	15:19	39	71	71
			16:12	45	57	16:19	39	74	74
			16:46	45	60	16:45	37	75	75

Denver 2007 Temperature and Humidity Data									
1/10 Time	1/10 °F	1/10 %RH	1/25 Time	1/25 °F	1/25 %RH	2/27 Time	2/27 °F	2/27 %RH	2/27 %RH
8:56	45	26	8:46	36	48	7:56	34	52	52
9:45	48	23	9:45	39	45	8:55	39	43	43
10:46	52	26	10:45	41	49	10:55	45	35	35
11:45	54	24	11:45	45	42	11:45	46	37	37
12:58	55	23	12:48	46	44	12:48	46	34	34
13:46	61	19	13:46	46	37	13:55	50	32	32
14:45	63	12	14:52	50	32	14:45	46	50	50
15:45	63	11	15:45	50	32	15:45	46	50	50
16:46	59	10	16:45	46	37	16:45	45	51	51

APPENDIX D: Sample Calculation of Vehicle Specific Power Adjusted Vehicle Emissions using data from Chicago 1997 and 1998.

1997 (Measured)	VSP Bin	Mean NO (ppm)	No. of Measurements	Total Emissions
	-5	236	225	53200
	0	224	1609	360090
	5	307	4985	1531000
	10	431	6146	2648020
	15	548	2624	1438060
	20	590	456	269180
			16045	6299550
		Mean NO (ppm)		393
1998 (Measured)	VSP Bin	Mean NO (ppm)	No. of Measurements	Total Emissions
	-5	233	137	31951
	0	239	784	187394
	5	265	3613	956613
	10	385	6685	2576433
	15	475	6012	2856195
	20	483	2392	1156320
			19623	7764906
		Mean NO (ppm)		396
1998 (Adjusted)	VSP Bin	'98 Mean NO (ppm)	'97 No. of Meas.	Total Emissions
	-5	233	225	52474
	0	239	1609	384588
	5	265	4985	1319877
	10	385	6146	2368700
	15	475	2624	1246616
	20	483	456	220436
			16045	5592691
		Mean NO (ppm)		349

Note that the Mean NO readings listed here have been rounded to the nearest ppm values which results in the Total Emissions column appearing to not be a direct multiplication product. The -5 to 20 kw/tonne bins are chosen to preclude any “off-cycle” emissions.

The object of this adjustment is to have the 1998 fleet’s emissions calculated as if they drove (VSP wise) like the 1997 fleet. This is accomplished by first binning and averaging the 1997 and 1998 data (the top two tables). We then combine the mean NO values from the 1998 fleet with the numerical VSP bin distribution from the 1997 fleet in the bottom table. The product of these two columns is summed and the sum total emissions are divided by the number of 1997 vehicles to produce the 1998 adjusted mean NO average. For this example, it shows that the 1998 fleet when driven like the 1997 fleet has lower NO emissions than the 1997 fleet.

APPENDIX E: Sample Calculation of Model Year Adjusted Fleet Emissions using data from Chicago 1997 and 1998

1997 (Measured)	Model Year	Mean NO (ppm)	No. of Measurements	Total Emissions
	83	690	398	274620
	84	720	223	160560
	85	680	340	231200
	86	670	513	343710
	87	690	588	405720
	88	650	734	477100
	89	610	963	587430
	90	540	962	519480
	91	500	1133	566500
	92	450	1294	582300
	93	460	1533	705180
	94	370	1883	696710
	95	340	2400	816000
	96	230	2275	523250
97	150	2509	376350	
			17748	7266110
		Mean NO (ppm)		409
1998 (Measured)	Model Year	Mean NO (ppm)	No. of Measurements	Total Emissions
	83	740	371	274540
	84	741	191	141531
	85	746	331	246926
	86	724	472	341728
	87	775	557	431675
	88	754	835	629590
	89	687	1036	711732
	90	687	1136	780432
	91	611	1266	773526
	92	538	1541	829058
	93	543	1816	986088
	94	418	2154	900372
	95	343	2679	918897
	96	220	2620	576400
97	177	3166	560382	
			20171	9102877
		Mean NO (ppm)		451
1998 (Adjusted)	Model Year	'98 Mean NO (ppm)	'97 No. of Meas.	Total Emissions
	83	740	398	294520
	84	741	223	165243
	85	746	340	253640
	86	724	513	371412
	87	775	588	455700
	88	754	734	553436
	89	687	963	661581
	90	687	962	660894
	91	611	1133	692263
	92	538	1294	696172
	93	543	1533	832419
	94	418	1883	787094
	95	343	2400	823200
	96	220	2275	500500
97	177	2509	444093	
			17748	8192167
		Mean NO (ppm)		462

APPENDIX F: Field Calibration Record.

1999				
Date	Time	CO Cal Factor	HC Cal Factor	NO Cal Factor
1/15	8:30	1.54	1.73	1.53
1/15	10:15	1.31	1.50	1.35
1/15	12:30	0.96	1.1	0.78
1/16	8:00	1.27	1.3	0.72
1/18	7:15	1.56	1.6	1.9
2/1	7:45	1.76	2.0	1.66
2/1	12:15	1.20	1.32	1.25

1999 / 2000				
Date	Time	CO Cal Factor	HC Cal Factor	NO Cal Factor
12/30	11:20	1.27	1.2	1.67
1/11	9:30	1.14	1.12	1.25
1/13	8:30	1.76	1.74	1.64
1/13	10:55	1.23	1.09	1.34
1/14	7:50	2.45	2.5	3.1
1/14	10:00	1.40	1.40	1.61

2001				
Date	Time	CO Cal Factor	HC Cal Factor	NO Cal Factor
1/5	7:30	1.96	2.2	3.1
1/5	11:45	1.13	1.05	1.32
1/6	7:00	1.57	1.42	1.84
1/6	11:30	1.41	1.35	1.66
1/8	7:05	1.67	1.6	2.32
1/8	11:30	1.18	1.1	1.6

2002 / 2003				
Date	Time	CO Cal Factor	HC Cal Factor	NO Cal Factor
12/31	11:14	1.33	1.44	2.22
12/31	13:09	1.258	1.204	1.733
1/7	10:00	1.342	1.204	1.443
1/7	12:35	0.974	0.939	1.084
1/7	15:12	1.157	1.158	1.277
1/8	9:15	1.237	1.191	1.834
1/8	11:10	0.97	1.096	1.493
1/31	10:00	1.124	1.084	1.567
1/31	12:00	0.912	0.932	1.257

2005				
Date	Time	CO Cal Factor	HC Cal Factor	NO Cal Factor
1/8	8:30	2.6	1.8	4.45
1/8	11:30	1.14	0.96	1.56
1/10	8:30	2.03	1.17	1.43
1/10	12:30	1.44	1.17	1.43
1/11	7:50	1.72	1.45	3.13
1/11	11:10	1.47	1.27	2.65

2007				
Date	Time	CO Cal Factor	HC Cal Factor	NO Cal Factor
1/10	9:00	1.67	1.51	2.27
1/10	10:10	1.49	1.69	1.76
1/10	12:40	1.16	1.10	1.26
1/25	8:25	2.14	1.87	2.27
1/25	9:20	1.45	1.26	1.35
1/25	12:15	1.35	1.25	1.34
2/27	8:30	1.55	1.47	1.69
2/27	9:35	1.37	1.34	1.35
2/27	11:25	1.19	1.18	1.19